



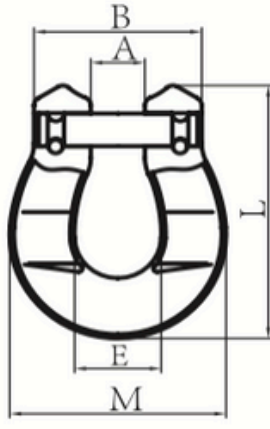
# TW PRODUCTS

Rigging Hardware, Chain, Wire Rope & Synthetic Products

- Forged Alloy Steel - Quenched and Tempered
- Individually Proof Tested to 2-1/2 times the Working Load Limit with certification
- Each link has a Product Identification Code for material traceability, along with the size and the name TW in raised letters (see illustration below)
- Suitable for use with Grade 100 chain
- Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles
- Painted in chartreuse ® our registered trademark color
- Subject to an extended one-year after-sale warranty



## TW1628 - G100 Omega Link

	WEIGHT (KG)	WLL (T)	B.L (T)	A±1	B±2	E±1.5	M±2	L±2
	0.12	1.4	5.6	8.5	32.5	20	44	55
	0.27	2.5	10	10.5	42	24	60	73.5
	0.44	4	16	12.5	48.5	31	70	90
	0.89	6.7	26.8	16	60	38.8	90	109
	1.77	10	40	19	75.5	51	112	141.5

Ultimate load is 4 times the Working Load Limit.