




TW PRODUCTS

Rigging Hardware, Chain, Wire Rope & Synthetic Products

- Forged Alloy Steel - Quenched and Tempered
- Individually Proof Tested to 2-1/2 times the Working Load Limit with certification
- Each link has a Product Identification Code for material traceability, along with the size and the name TW in raised letters (see illustration below)
- Suitable for use with Grade 100 chain
- Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles
- Painted in chartreuse ® our registered trademark color
- Subject to an extended one-year after-sale warranty



TW1621 - G100 Connecting Link EU Style

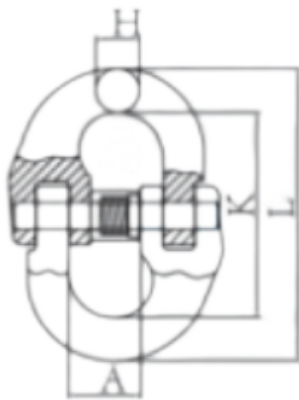

WEIGHT (kg)	WLL (T)	B.L (T)	A	B	C	D	K	H
0.08	1.4	5.6	14±0.8	16.9±0.8	8.5±0.8	7±0.5	44.5±2.5	11+0.5-1
0.16	1.9	7.6	18.5±0.8	22.5±0.8	10±0.8	8.2±0.5	59±3	12.5+0.5-1
0.17	2.5	10	18.5±0.8	22±0.8	11±0.8	8.5±0.8	59±3	13+0.5-1
0.18	2.5	10	18.5±0.8	22.7±1	10.5±0.8	10±0.8	63±3	14+0.5-1
0.34	4	16	23±1	27.7±1	12.6±1	12.6±1	71±3	18+0.8-1
0.68	6.7	26.8	28±1	33.2±1	16.5±1	16.5±1	92.5±3	23+0.8-1
1.22	10	40	33.5±1	39±2	20±1	20±1	106.5±3	29.5±1
2.13	16	64	42±1	47.3±3	25±1.5	25±1.5	123±3	35.5±1.5
3	19	76	48±1	55±3	27±1.5	27±1.5	137.5±3	39±2
5.22	26.5	106	61±2	68±3	32±2	32±2	163±4	45±2.5
9.55	39.3	157.2	80±2	87±3	40±3	40±3	197±4	54±3

Ultimate load is 4 times the Working Load Limit.