




TW PRODUCTS

Chain, Wire Rope & Rigging Hardware

ROUND PIN CHAIN SHACKLES



G-215 / S-215

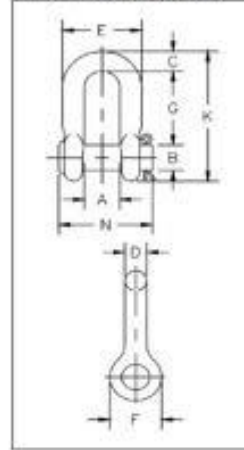

Nominal Size	W.L.L.		Weight Each		Dimensions (MM)									Tolerance +/-	
	T	LBS	KG	LBS	A	B	C	D	E	F	G	K	N	G	A
1/4	1/2	1100	0.05	0.11	119	7.85	6.35	6.35	24.6	15.5	22.4	40.4	34.0	1.50	1.50
5/16	3/4	1650	0.08	0.176	135	9.65	7.85	7.85	29.5	19.1	26.2	48.5	40.4	1.50	1.50
3/8	1	2200	0.11	0.242	168	11.2	9.65	9.65	35.8	23.1	31.8	58.5	47.2	3.30	1.50
7/16	1-1/2	3300	0.18	0.396	191	12.7	11.2	11.2	41.4	26.9	36.6	67.5	54.0	3.30	1.50
1/2	2	4400	0.23	0.506	206	16.0	12.7	12.7	46.0	30.2	41.4	77.0	60.5	3.30	1.50
5/8	3-1/4	7150	0.55	1.21	269	19.1	15.7	16.0	58.5	38.1	51.0	95.5	74.0	3.30	1.50
3/4	4-3/4	10450	0.91	2.002	318	22.4	20.6	19.1	70.0	46.0	60.5	115	87.0	6.35	1.50
7/8	6-1/2	14300	1.49	3.278	366	25.4	24.6	22.4	81.0	53.0	71.5	135	96.5	6.35	1.50
1	8-1/2	18700	2.15	4.73	429	28.7	25.4	25.4	93.5	60.5	81.0	151	115	6.35	1.50
1-1/8	9-1/2	20900	2.86	6.292	460	31.8	31.8	28.7	103	68.5	91.0	172	130	6.35	1.50
1-1/4	12	26400	4.08	8.976	515	35.1	35.1	31.8	115	76.0	100	191	140	6.35	3.30
1-3/8	13-1/2	29700	5.44	11.968	570	38.1	38.1	35.1	127	84.0	111	210	156	6.35	3.30
1-1/2	17	37400	7.33	16.126	605	41.4	41.1	38.1	137	92.0	122	230	165	6.35	3.30
1-3/4	25	55000	13.6	29.92	730	51.0	54.0	44.5	162	106	146	279	197	6.35	3.30
2	35	77000	19.6	43.12	825	57.0	51.0	53.3	184	122	172	312	222	6.35	3.30

*NOTE : Maximum Proof Load is 2.0 times the Working Load Limit. Minimum Ultimate Strength is 6 times the Working Load Limit.