




TW PRODUCTS

Chain, Wire Rope & Rigging Hardware

U.S. SCREW PIN CHAIN SHACKLES

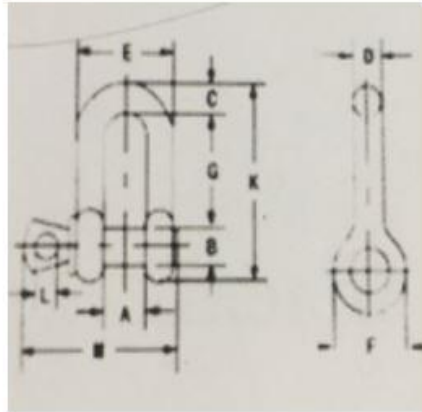

Screw Pin Anchor Shackles
Meet the performance requirements of
Federal Specification RR-C-271D Type
IVB, Grade A, Class 2

Bolt Type Anchor shackles with thin
head bolt-nut with cotter pin
Meet the performance requirements
of Federal Specification RR-C-271D
Type IVB, Grade A, Class 3

Nominal Size (IN.)	W. L. L. (LBS)	Weight Each (LBS)	Dimensions(MM)										Tolerance +/-	
			A	B	C	D	E	F	G	L	M	P	C	A
1/4	1100	0.11	11.9	7.85	6.35	6.35	24.6	15.5	22.4	40.4	4.85	35.1	1.50	1.50
5/16	1650	0.18	13.5	9.65	7.85	7.85	29.5	19.1	26.2	48.5	5.60	42.2	1.50	1.50
3/8	2200	0.29	16.8	11.2	9.65	9.65	35.8	23.1	31.8	58.5	6.35	51.5	3.30	1.50
7/16	3300	0.44	19.1	12.7	11.2	11.2	41.4	26.9	36.6	67.5	7.85	60.5	3.30	1.50
1/2	4400	0.59	20.6	16.0	12.7	12.7	46.0	30.2	41.4	77.0	9.65	68.5	3.30	1.50
5/8	7150	1.25	26.9	19.1	15.7	16.0	58.5	38.1	51.0	95.5	11.2	85.0	3.30	1.50
3/4	10450	2.64	31.8	22.4	20.6	19.1	70.0	46.0	60.5	115	12.7	101	6.35	1.50
7/8	14300	3.15	36.6	25.4	24.6	22.4	81.0	53.0	71.5	135	12.7	114	6.35	1.50
1	18700	4.73	42.9	28.7	25.4	25.4	93.5	60.5	81.0	151	14.2	129	6.35	1.50
1-1/8	20900	6.73	46.0	31.8	31.8	28.7	103	68.5	91.0	172	16.0	142	6.35	1.50
1-1/4	26400	9.04	51.5	35.1	35.1	31.8	115	76.0	100	191	17.5	156	6.35	1.50
1-3/8	29700	11.62	57.0	38.1	38.1	35.1	127	84.0	111	210	19.1	174	6.35	3.30
1-1/2	37400	15.91	60.5	41.4	41.1	38.1	137	92.0	122	230	20.6	187	6.35	3.30
1-3/4	55000	26.6	73.0	51.0	54.0	44.5	162	106	146	279	25.4	231	6.35	3.30
2	77000	42.2	82.5	57.0	60.0	51.0	184	122	172	312	31.0	263	6.35	3.30
2-1/2	121000	71.5	105	70.0	66.5	66.5	238	145	203	377	35.1	330	6.35	6.35

Maximum Proof Load is 2 times the Working Load Limit. Minimum Ultimate Strength is 6 times the Working Load Limit.